

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



551 093

(43) International Publication Date  
4 November 2004 (04.11.2004)

PCT

(10) International Publication Number  
**WO 2004/094072 A1**

(51) International Patent Classification<sup>7</sup>: **B05B 7/24**

(21) International Application Number:  
PCT/US2004/007860

(22) International Filing Date: 12 March 2004 (12.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0307902.7 5 April 2003 (05.04.2003) GB

(71) Applicant (for all designated States except US): **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **JOSEPH, Stephen,**

C., P. [GB/US]; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **SILTBERG, Daniel, E.** [US/US]; Post Office Box 33427, Saint Paul, MN 55133-3427 (US).


(74) Agents: **LITTLE, Douglas, B.** et al.; Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: **SPRAY GUN WITH ROTATABLE RESERVOIR**

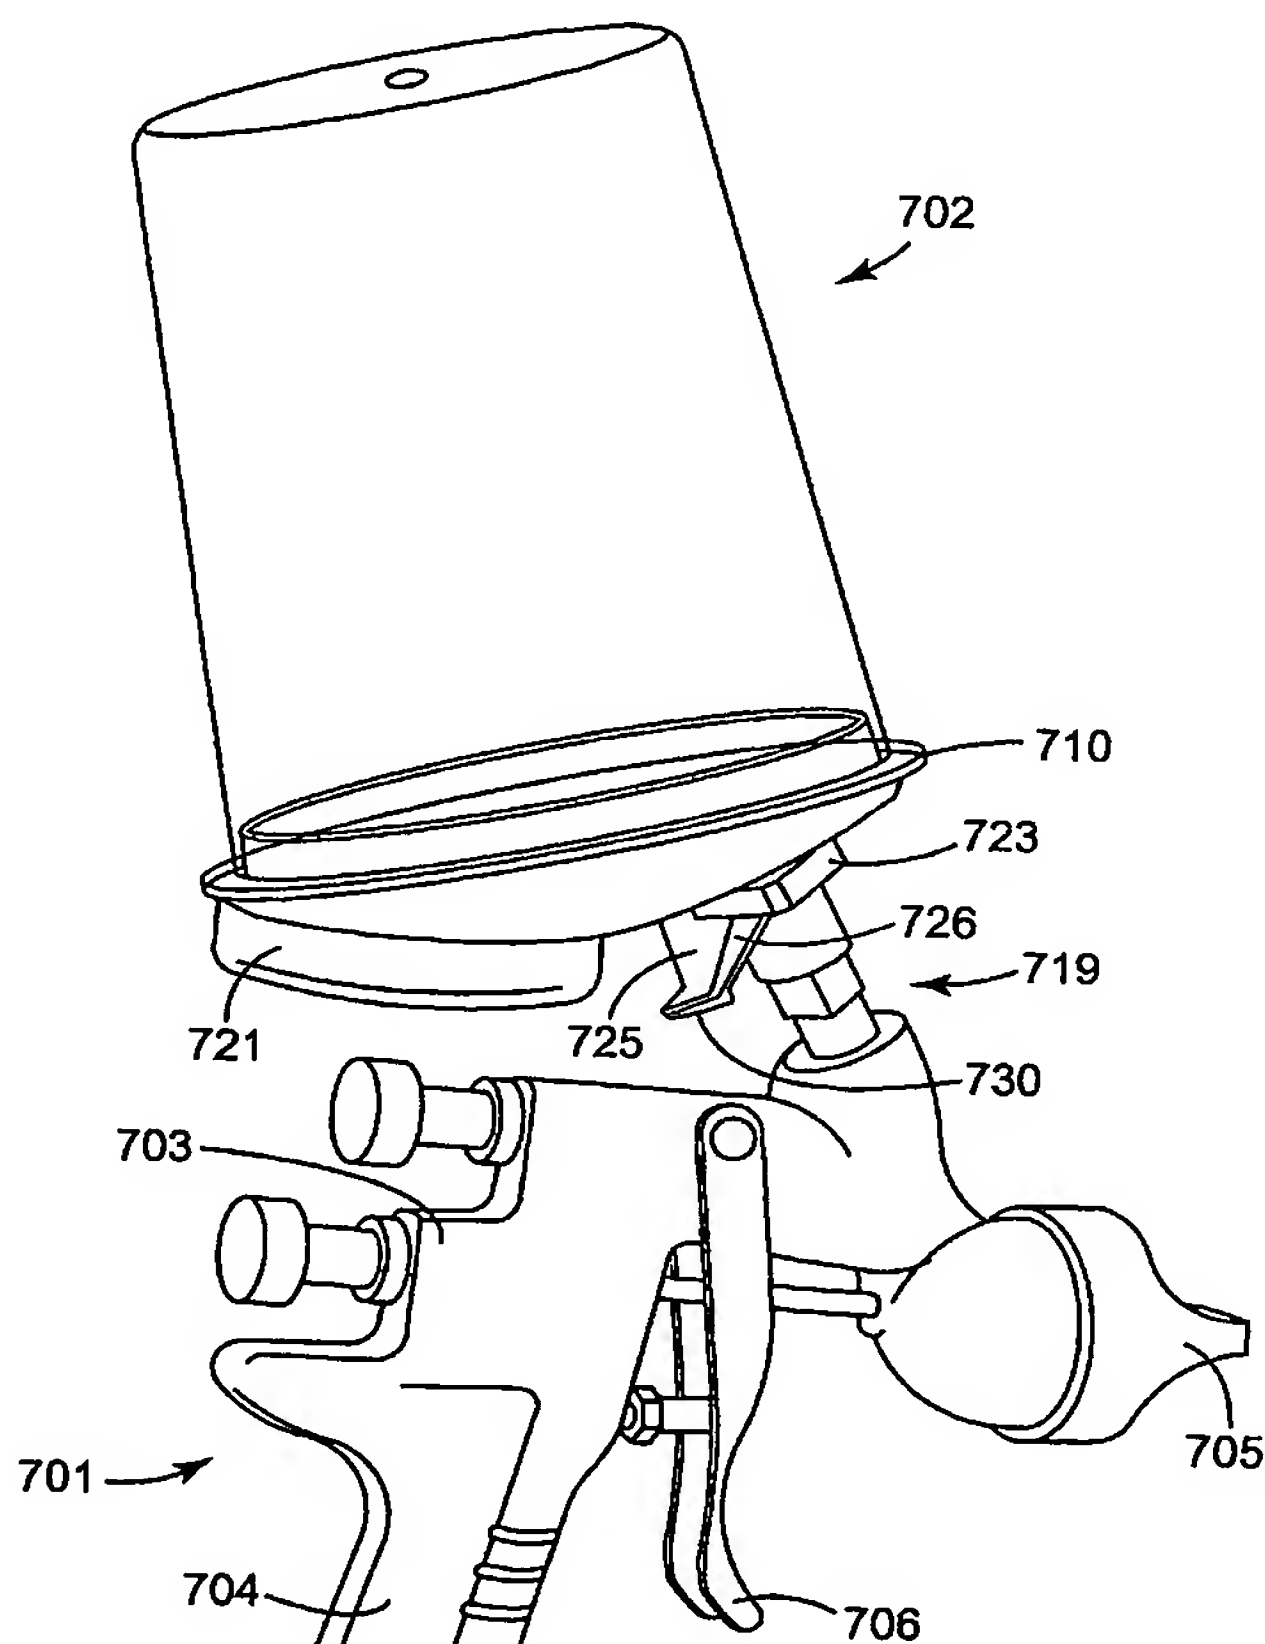

(57) Abstract: A reservoir (402) for connection to a spray gun has a lid (410) provided with an outlet spout (415) that is rotatably received in a socket of an inlet adaptor (419) connectable to the spray gun. The lid (410) has a spring leg (425) spaced from the outlet spout (415) with a projection (426) at the distal end for self-latching engagement with a flange (423) of the adaptor (419) to secure releasably the reservoir (402) to the spray gun. The engagement of the projection (426) and flange (423) enables the reservoir (401) to be rotated through 360° to adjust the position of the reservoir (402) while attached to the spray gun.

WO 2004/094072 A1



GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.